

PRECISION OPEN FACE FLAT LAPPING MACHINE



The Lapmaster Wolters Model 36 is the perfect size for engineering workshops, where flatness and finish are of prime importance over a wide range of component sizes. It is equipped with a 914mm diameter serrated lap plate, manufactured from Grade 300 grey cast iron to ISO 185(2005) as standard. Other plates can be supplied on request.

The machine is self contained and the rigid welded tubular section steel frame supports the reduction gearbox and drive motor and houses the abrasive compound system and the waste tank. Access to these is provided by lift off panels.

The machine is intended for use with free abrasive compounds. A dispensing system, for use with water and diamond compounds etc., can also be fitted.

Flatness of the machines lap plate, and consequently of the work, is controlled by adjusting the position of the conditioning rings relative to the lap plate track.

The lapping plate drive system uses a separate motor and worm & wheel mechanical reduction gearbox with multi-belt drive.

The Lapmaster Wolters model 36 can be used to process a wide variety of materials including semiconductors, electro optics, ceramics, metals and many other specialty products.

This floor standing machine is also available in a pneumatic lift version. Please see appropriate datasheet, available on request.



STANDARD FEATURES

- Heavy duty floor standing base with integrally mounted drive motor, reduction gearbox.
- Heavy duty work table, vertically adjustable.
- Three conditioning rings, with adjustable, sealed roller bearing yoke assemblies to maintain lap flatness.
- Free standing abrasive system complete with pump multiple point distribution.
- High torque drive unit consisting of 4.0kW motor and reduction gearbox. Lap plate speed 58 rpm.
- Operator controls at 110V, complies with EN 60 204.
- CE compliant.
- Soft start to main drive motor.
- Operator panel with start / stop controls, and multiple range digital process timer.
- Waste tank.

STANDARD TOOLING

- High density, cast iron serrated lap plate. 914mm O.D. x 172mm I.D.
- Three high density cast iron serrated conditioning rings. 419mm O.D. x 368mm I.D.
- Three pressure weights.
- Three blank workholder discs.
- Operation and maintenance manual.

MODEL 36 - PRECISION OPEN FACE FLAT LAPPING MACHINE

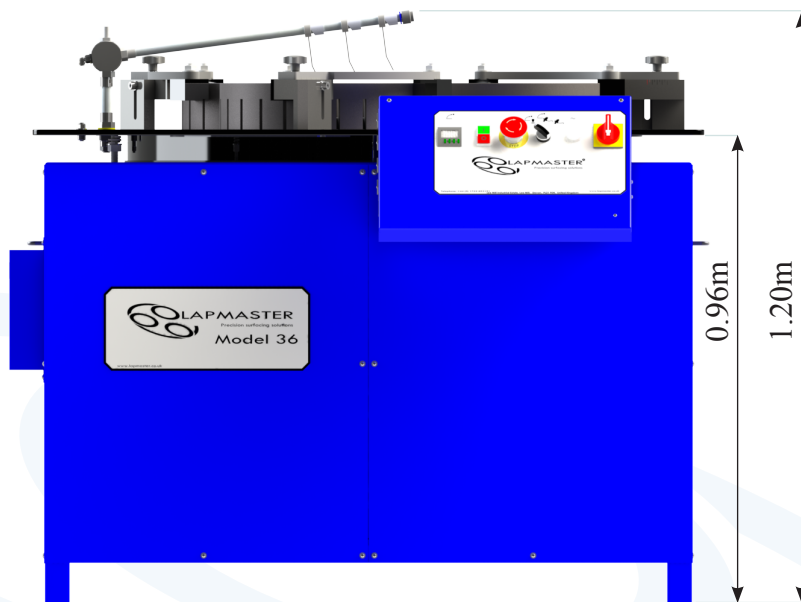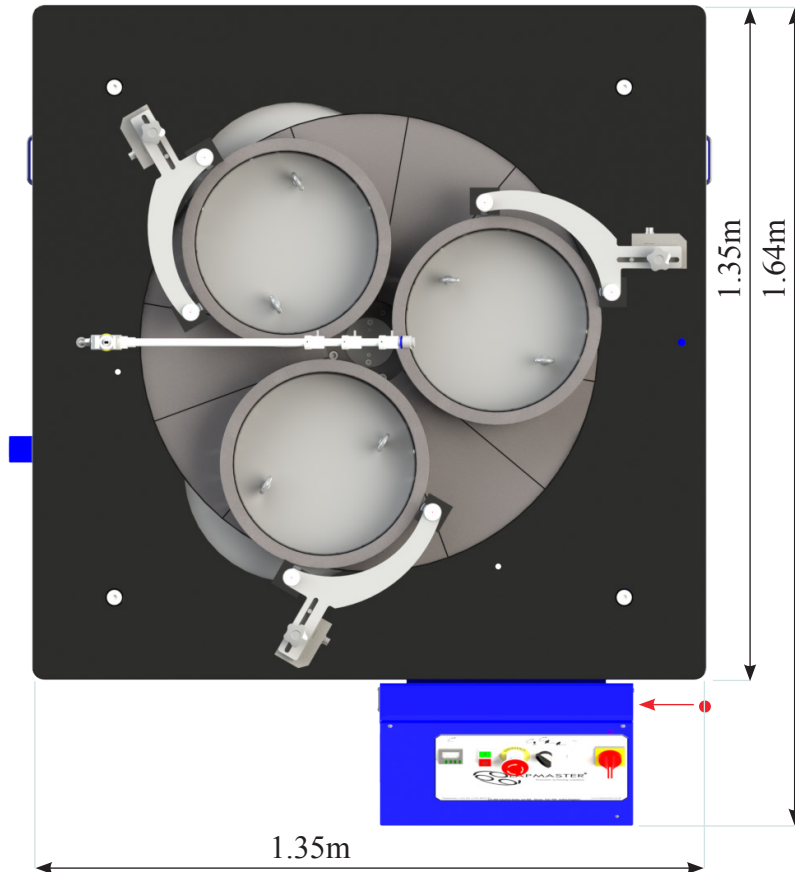

OPTIONAL TOOLING

- Flatness gauge.
- Solid stainless steel backing plates.
- Composite faced plates.
- Solid cast iron lap plate.
- Polishing pads.

OPTIONAL FEATURES

- Four ring model.
- Pneumatic lift version.
- Electronic variable speed drive.
- Water cooled lap plate.
- Non-standard voltages.
- Stainless steel wetted parts.
- Peristaltic pump.
- Corporate colours.
- Fixed guarding.

APPROXIMATE WEIGHT

- 1100 kg.

SERVICES

- Electrical: 230/380V, 3 Phase, 50Hz.
- Air: 400 kPa / 4 bar minimum. (if applicable).
- Water: 100 kPa / 1 bar minimum. (if applicable).

Lapmaster Wolters Ltd

International Lapping, Grinding and Polishing Machine Systems

Lee Mill Industrial Estate, Ivybridge, Devon, PL21 9EN UK

T: + 44 (0)1752 893191 F: + 44 (0)1752 896355 E: sales@lapmaster-wolters.co.uk

www.lapmaster-wolters.co.uk

